



香港斯普鑫实业发展有限公司  
广州斯普鑫轻工机械设备有限公司  
HONGKONG SIPUXIN INDUSTRIAL DEVELOPMENT CO., LTD.  
GUANGZHOU SIPUXIN LIGHT INDUSTRY MACHINERY CO., LTD.

中国销售部China's sales department:  
广州市白云区夏李社盛工业品展览中心A8栋25-26号  
No.25-26, Building A8, Gusheng Industrial Products Exhibition Center,  
Guanghua Road(Xiexiao Section), Baiyun, Guangzhou, P.R.China  
电话Tel: +86-20-86346039  
传真Fax: +86-20-36026305  
企业官网: <http://www.gzspx.com>  
阿里巴巴中国站: <http://gzsipuxin.1688.com>  
邮箱E-mail: [sale@gzspx.com](mailto:sale@gzspx.com)

国际销售部International sales department:  
广州市白云区嘉禾街2社禾权岭工业区3号厂房1-9号  
NO. 1-9 Building, NO. 3 Factory, Heqianling Industry Zone, Yibian 2nd.  
Community, Jiahe Street, Baiyun District, Guangzhou, P.R. China  
电话Tel: +86-20-221901182  
传真Fax: +86-20-221905183  
阿里巴巴国际站: <http://www.gzspx.en.alibaba.com>  
<http://www.gzspk2.en.alibaba.com>  
邮箱E-mail: [sale1@gzspx.com](mailto:sale1@gzspx.com) [sale@gzspx.com](mailto:sale@gzspx.com)

工厂: 扬州斯普鑫轻工机械设备厂  
工厂地址: 江苏省高邮市卸甲镇联星村  
Factory: yangzhou sipuxin light industry machinery equipment factory  
Factory address: Lianxing Village, Xieji Town, Gaoyou, Jiangsu, P.R. China  
24小时热线Hour hotline: +86-13926014358



企主官网



中国站网址



Overseas Website



微信公众号

设计印刷 塑料包装 金属包装

GMP 日化&制药设备制造商  
GMP daily chemical & pharmaceutical equipment manufacturer



**SIPUXIN**  
斯普鑫 机械  
SIPUXIN MACHINERY

SIPUXIN  
日化&制药  
INDUSTRY MACHINERY

斯普鑫



成功 & 智慧  
斯普鑫机械

SUCCESS, WISDOM, SIPUXIN MACHINERY

GMP daily chemical and pharmaceutical  
equipment manufacturer

# 致辞

天道酬勤，厚德载物。  
斯普鑫追求的不是利润的最大化，  
而是价值创造能力的最大化

## CONCEPT

Hard work pays off and great virtues can carry all things.  
Sipuxin is not seeking the maximized profits, but the  
maximized ability to create value.



斯普鑫董事长  
SIPUXIN President:  
TONY ZHAO

寒暑往来，岁月更迭。十几年的风雨兼程，斯普鑫在众多新老朋友的呵护下，在斯普鑫人的精心培育和浇灌下，从一颗充满生机和活力的幼苗长成今天沉稳浓郁的参天大树。硕果累累，如今的斯普鑫走出了一条创新之路、发展之路、领先之路，在国内外市场赢得了良好口碑和一致推崇。

竞争日益激烈和经济全球化的时代，我们必须讲究效率及增值创新能力。为了实现可持续发展，企业必须同时具备多项成功的要素，包括全景思维、务实创新、良好的管理、完善而灵活的组织和制度、出色可靠和富有经验的管理阶层、勤奋负责和忠诚服务的员工、科学及完备的数据库。斯普鑫人奉行：专业、专注、专心，为日化、食品、制药领域提供世界一流装备。

以倡导绿色科技为己任，着眼于产品制造的精益求精，着眼于未来发展的广袤深奥；以创造为使命，恪守朴拙本真的制造原理，开拓颠覆传统的制造新概念。服务未来，以坚实沉稳的步伐，走斯普鑫特有的创新之路。实现企业、社会、自然的和谐发展，与社会各界共同创造和分享美好明天！





# 简介

以客户成功引领技术革新，持续为客户创造更大价值。  
化妆品设备制造行业的技术创新者和领航者

## PROFILE

Customer success lead technical innovation, continue to create greater value for customers, Cosmetics equipment manufacturing industry technical innovator and leader

广州斯普鑫轻工机械设备有限公司是以扬州斯普鑫轻工机械设备厂为坚实后盾，专业从事化妆品、制药、食品、日化等行业的成套设备制造商，为客户提供多种特殊应用领域的解决方案，满足客户多样化需求。“高度专业化、适度多元化”企业管理模式的成功，使斯普鑫已成为拥有产业领导地位的品牌企业。斯普鑫致力于为化妆品、制药、食品、日化等行业的企业做强、做大提供坚实后盾，服务于太阳神集团、广州优祥、广州艾丽诗、广州悠莱、茂名消毒厂、惠州炬鼎、深圳活力科技、贵州宏宇药业、沧州三庆、北京万恩、北京同仁堂、香港远洋科技、韩国美芝琳、韩国韩熙、新加坡Magic Touch等国内外著名企业。

斯普鑫公司致力于为客户提供专业、创新、完美的产品体验度。主要产品有真空均质乳化机系列、离剪切液洗涤搅拌机系列、RO反渗透水处理系列、储罐、各式膏霜、液体、粉体全自动及半自动灌装线、各类瓶型压盖机、旋盖机、贴标机、喷码机及其他彩印、香水整套生产线、实验室设备、流水线工作台等。

斯普鑫公司本着“客户为本”的经营理念，协助客户进行现场厂房设计、设备选型，为客户提供从产品设计研发、生产制造、工程安装、技术顾问到售后维修的“一站式贴心服务”。不断加强核心技术的研发和创新，严格的质量监控，精密的检测流程，确保每一条生产线都超越客户的期望。”斯普鑫就在您身边，竭诚服务到永远”，赢得了国内外广大客户的信任与支持。

广州斯普鑫成立以来所取得的辉煌成绩，使每一个斯普鑫人坚信：天道酬勤，厚德载物。在圆满完成第一个五年规划的任务之后，斯普鑫将继续秉承一贯的专业经营理念，弘扬诚信、敬业、发展、领先、和谐的企业精神，在下一个五年规划中，持续为客户创造更大价值。从产品的设计、制造到品质，无一不精雕细琢，精益求精，来回馈客户朋友的关心和爱护。在跻身世界一流的化妆品、制药、食品、日化成套设备生产供应商的宏伟蓝图上步步成真。臻善尽美，始终如一。

Guangzhou Sipuxin Light Industry Machinery Co., Ltd. is a professional manufacturer of whole-set equipment for such industries as cosmetics, pharmaceutical, food and daily chemical, etc., with solid backing from Yangzhou Sipuxin Light Industry Machinery equipment Factory. Sipuxin provides clients with various solutions for special applications and meeting diversified demands of clients. The successful enterprise management mode of 'high specialization and moderate diversification' has made Sipuxin a famous brand enterprise leading the industry. Sipuxin is devoted to providing solid support for enterprises in such industries as cosmetics, medicine, food and daily chemicals to become more powerful and bigger. We provide services for many famous domestic and international enterprises such as Apollo Group, Guangzhou UTree, Guangzhou AllQ, Guangzhou urata, Maoming Sterilizing Factory, Huzhou Junqiang, Shenzhen Bio-Genetec, Guizhou Sangjing, Peking WINCHEM, Peking Tongrentang, Hong Kong Yuanyang Technology, Korea Mezilin, Korea Dr Hancy, Singapore Magic Touch, etc.

Sipuxin is devoted to bringing professional, innovative and perfect product experience to clients. The main products include vacuum homogenizing emulsifier, high-shear liquid detergent mixer, reverse osmosis water treatment, storage tank, various cream, liquid and powder automatic and semi-automatic filling production line, various bottle capping machine, labeling machine, inkjet printer and other cosmetic and perfume whole-set production line, laboratory equipment, conveyor, etc.

Holding the business philosophy of "customer foremost", Sipuxin supports clients to carry out factory design and model selection according to existing sites and provides clients with "one-stop considerate services" including: product design, research and development, production, engineering installation, technical consultation and after-sales maintenance. We are continuously intensifying the research, development and innovation of core technology and ensuring that every production line exceeds customer expectation with strict quality monitoring and precise inspection procedures. "Sipuxin is always with you. Sincere service lasts forever." We have won trust and support from clients all over the world.

The remarkable achievements that Sipuxin has accomplished since its establishment make all Sipuxin personnel believe that "Hard work pays off" and great virtues promotes growth. After successfully completing the tasks for the first five-year plan, Sipuxin will continue to create more value for our clients in the next five-year plan by always keeping to the professional business philosophy and carrying forward the enterprise spirit of sincerity, devotion, development, leading and harmony. We will repay care and concern of our clients with exquisite craftsmanship and continual improvement in product design, manufacturing and quality and strive for the goal of becoming a world's first-class manufacturer and supplier of whole-set equipment for cosmetics, pharmaceutical, food and daily chemical. Seeking perfection and keeping consistent is our insistence.



# 团队

人才是企业的根本  
管理是企业的灵魂

## TEAM

Management is the soul of the  
Enterprise and talents are the bases of the enterprise

人才是企业应对市场激烈竞争，实现企业战略目标和持续发展的首要资源。斯普鑫以其独特的企业文化，以情感留人，真情动人，情思感人，才能聚人，为人才创造良好的成长环境，引导人才逐步实现自己的职业生涯规划。

科学管理、团队经营，是斯普鑫人才管理的一贯传统；积极进取、顺势而变，使斯普鑫焕发勃勃生机。信任激励、职务激励、知识激励、情感激励、目标激励和荣誉激励，塑造新时代的斯普鑫人。斯普鑫努力探索“高度专业化、适度多元化”的企业经营管理模式，致力于产业领导地位的建立，确保斯普鑫基业长青。

Talents are the prime resources for our enterprise to cope with sharp market competition and realize enterprise strategy goals and sustainable development. With unique enterprise culture, Sipuxin retains talents with emotion, touches them with sincerity and gathers them with ability, creating a good growth environment for talents and guiding them to gradually realize their career planning.

Scientific management and team operation is the consistent tradition of Sipuxin. Being active and enterprising and changing with the trend bring vigor and vitality to Sipuxin. We are creating Sipuxin personnel of the new era through trust encouragement, position encouragement, knowledge encouragement, emotion encouragement, objective encouragement and honor encouragement. Sipuxin strives to explore the enterprise management mode featured by high specialization and moderate diversification, devotes itself to establishing a leading position in the industry and ensures permanent enterprise business.

# 技术

全面的创新技术, 精良的设计与制造  
成就真正的经典

## TECHNOLOGY

Comprehensive and innovative technology and fine design  
and manufacturing accomplish the real classics.



斯普鑫全面的创新技术，拥有国内领先的硬件、软件设施、专业的技术研发队伍，在项目开发阶段，项目小组承建工艺、工程设计，通过大量使用工业工程电脑辅助设计及工艺模拟系统，通过CAD电脑辅助设计、三维的模拟效果，斯普鑫能够优化整个生产过程的效果，使客户对整个项目一目了然。

Sipuxin has comprehensive and innovative technology, nationally leading hardware and software facilities as well as professional technical research and development team. During the project development stage, the project team receives and develops process and project design. By adopting computer-aided design for industrial project and process analog system, we are capable of optimizing the effect of the whole production process and making clients clear about the whole project.



# 资质

一份耕耘，一份收获，  
一次次播撒希望，一次次收获喜悦

## QUALIFICATION

No pains, a harvest

Sow hope again and again, again and again to harvest joy

每份证书都是我们奋力拼搏的结晶，每份荣誉都是我们的金名片和通行证，  
是我们一个个路标，是我们一次次的历程。

All the certificates are the crystallization we have struggled. Each honor are our gold card and passport, they are every signpost of Sipuxin which record every journey of us.



## 原件材料来源 MATERIAL SOURCES OF PARTS

Panasonic  
ideas for life

ABB

SEW  
EURODRIVE

三菱电机  
MITSUBISHI ELECTRIC

FESTO

Schneider  
Electric

SIEMENS

3M

Dow

DELTA

NSK

Danfoss

+GF+

OMRON  
Sensing tomorrow™

GRUNDFOS

FLENDER

主要部件价值80%以上的元件材料来自世界著名厂商  
80% of the main parts of our products are provided by world's famous suppliers.



# 展示

精品多样化、  
规范化铸就企业实力和品牌

## SHOW

Diversified and standardized fine  
products build enterprise strength and brand.



# 装备

每项技术革新  
都凝结着工程师的智慧和汗水

## CONCEPT

Each item of technical innovation  
concentrates intelligence and sweat of engineers



斯普鑫坚信优质的产品除了有优质的管理、优秀的员工，更须拥有先进、精良的机械加工专用设备。市场竞争的基础，离不开生产实力，离不开完善先进的硬件设施。深知硬件设施重要性的斯普鑫，在同行业率先引进国内外先进的生产设备，几年来更先后投入资金对硬件设施进行更新换代，以国际化的生产设施生产出符合国际标准的高品质产品。

Sipuxin strongly believes that high quality products are manufactured not only through excellent management, prominent employees, but also through advanced and fine special equipment for mechanical machining. The basis of market competition, inseparable from the production capability, and can not do without an advanced hardware facilities. Sipuxin aware of the importance of hardware facilities, the first peer in the industry to the introduction of foreign advanced production equipment. In recent years has invested funds Hardware facilities for upgrading to the internationalization of production facilities to produce high-end quality products to meet the GMP standard.

因为专注，所以专业 Because the focus, so professional



# 工程

满足GMP标准  
的化妆品机械设备供应商

## ENGINEERING EXAMPLE

Supplier of cosmetic machinery  
and equipment meeting the GMP standard

经营项目：  
真空均质乳化机系列、高剪切液流搅拌机系列、RO反渗透水处理系列、储罐、各式管道、  
液体、粉体全自动及半自动灌装线、各类瓶型压盖机、旋盖机、贴标机、喷码机及其他彩妆、香水整套生产线、  
实验室设备、流水线工作台等。

因为专注，所以专业 Because the focus, so professional

# 工程

为您提供从工艺设计  
到设备安装调试一条龙服务

## ENGINEERING EXAMPLE

Providing you with a chain of services including process  
design, equipment installation and commissioning



Manage item:  
vacuum homogenizing emulsifiers, high shear liquid detergent mixers, reverse osmosis ion water devices, various water injection, liquid and ointment semi-automatic and automatic filling production lines, round and flat bottles automatic and semi-automatic labeling machines, perfume whole-set production lines, laboratory equipment, flow lines, etc.



# 工程

当您选择斯普鑫, 我们提供的不仅仅是产品,  
更是专业、细心、完善的服务

## ENGINEERING EXAMPLE

When you choose Sipuxin, we provide professional,  
considerate and perfect services in addition to products.

公司提供一流的專業工程安装经验和管理经验，本着精益求精的工作态度，  
为用户提供良好的售后服务，竭诚满足用户的需求。

Our company provides internationally top-ranking professional project installation experience and  
management experience. By holding the work spirit of keeping improving, we provide users with good after-sales  
service and meet customer requirements. Professional personnel are the guarantee for good service.



因为专注, 所以专业 Because the focus, so professional

# 领域

提供多种特殊应用领域的解决方案，  
满足您不同的需求

## GENERAL SITUATION

Providing various solutions for special  
applications to meet your different demands



### 成套生产线

COMPLETE PRODUCTION LINE

膏霜生产线 Paste & Cream Production Line
洗发生产线 Liquid Washing Production Line
雾沫罐生产线 Aerosol Production Line
粉饼生产线 Foundation Production Line

香水生产线 Perfume Production Line
牙膏生产线 Toothpaste Production Line
口红生产线 Lipstick Production Line
香皂生产线 Toilet Soap Production Line

## 我们的合作伙伴 OUR PARTNER

在与所有客户的合作中，我们秉持“为客户创造价值优先”的原则，不追逐短期的企业利润最大化。  
我们乐见于能够帮助客户成长和壮大。对斯普信而言，客户不是买方或卖方，而是同舟共济、共同成长的伙伴。

In cooperation with all of our customers around the world, our company consistently gives priority to  
“Create value for our customers”, instead of chasing short-term max profit. We are glad and feel honored to  
help our customers make their enterprises more potential and powerful. For Sipuxin company, customers are not  
only the buyers, but also the partners and friends uniting together.



HANXI 韩熙  
—植物护肤·美丽天成—

三庆 Sangq

北京同仁堂



范特西 FANTASY

MARUBI 美力

Amway 安利

WINCHEM



活力國際集團  
Energy-International Co.,Ltd



香港远洋



贵州宏宇药业



悠莱 urara



CHCÉDO  
自然堂





“诚信无价”这是斯普鑫人提出的响亮口号，诚信果然是无形的，但斯普鑫却把诚信当成资源来开发，确定了“以诚信打造精品、以诚信立足市场、以诚信取得社会、以诚信赢得未来”的经营理念。  
"Honesty is priceless", which is a slogan brought forward by Sipuxin personnel. Though honesty is intangible, Sipuxin regards it as a resource to develop, specifying the business philosophy of "creating fine products by honesty, finding a foothold in the market by honesty, getting reliance from society by honesty, building famous brand by honesty and winning the future by honesty".



# 营销

真诚服务 嬴得信赖  
立足于市场 服务于市场

## MARKETING

Winning trust through sincere service  
Finding a foothold in the market  
and serving the market

广大忠实的客户，是斯普鑫人赖以生存的基石。“诚实、守信、开拓、进取”是斯普鑫公司信奉的营销理念，与客户共同进步则是我们追求的目标。本公司始终坚持灵活多样的市场营销策略，积极开展以客户为中心的市场营销策划工作，实施地区销售战略，可以满足国内外各地等地区客商的高端需求。

Faithful customers are the base for Sipuxin personnel to survive. "Being sincere, faithful, pioneering and enterprising" is the marketing concept. Sipuxin Company always abides by, and it is our goal to seek for mutual progress with customers. By consistently adhering to diversified marketing strategies, our company is actively developing marketing activities revolving around customers and executing the regional sales strategy. We can meet the high-end demands of domestic and international merchants.





● 真空乳化机系列  
Homogenizing emulsifier series



● 液洗搅拌锅系列  
Liquid washing mixer series



● 储罐系列  
Storage tank series



● 水处理系列  
Water treatment series



● 灌装机系列  
Filling machine series



● 贴标机系列  
Labeling machine series

- 101 SZ真空均质乳化机系列  
Vacuum homogenizing emulsifier series
- 102 SZR-HB双缸液压升降下料泵真空均质乳化机  
Duplex hydraulic lifting vacuum homogenizing Emulsifier (bottom homogenizer)
- 103 SZR-HA双缸液压升降上料泵真空均质乳化机  
Duplex hydraulic lifting vacuum homogenizing Emulsifier (top homogenizer)
- 107 SPX-F恒定式真空均质乳化机  
Fix-type vacuum homogenizing emulsifier
- 110 SPX-S小型真空均质乳化机  
Small vacuum homogenizing emulsifier
- 111 SPX-C真空制膏机  
Vacuum paste & cream making machine

- 121 SJB液洗均质搅拌锅  
Liquid detergent blending mixer
- 122 SJB-D液洗均质搅拌锅(单罐)  
Liquid detergent blending mixer (single tank)
- 123 SJB-Z液洗均质搅拌锅(适合罐)  
Liquid detergent blending mixer (combined tank)
- 124 SJB-P聚丙烯防腐搅拌锅  
Polypropylene anti-corrosion mixer

- 125 SCG-W 无菌储罐  
Sterile storage tank
- 126 SCG-F 活动开盖储罐  
Flip-open cover storage tank
- 127 SCG-J 搅拌储罐  
Mixing storage tank

- 128 SRO反渗透纯水装置(不锈钢)  
Reverse osmosis water treatment
- 129 SRO反渗透纯水装置(PVC)  
Reverse osmosis water treatment

- 131 SGZ全自动灌装机  
Fully automatic filling machine
- 132 SGZ-Y全自动液体灌装线  
Full automatic liquid filling line
- 133 SGZ-Q全自动酱料灌装线-理瓶机  
Full automatic cream & paste filling Line with bottle turntable
- 134 SGZ-P转式酱料灌装机  
Rotating filling & cover feeder & capping machine
- 135 SGZ-L立式气动膏液灌装机  
Vertical pneumatic cream & liquid Filling machine
- 136 SGZ-W卧式自吸式灌装机  
Self-suck horizontal filling machine
- 137 SGZ其他灌装机  
Other filling machine
- 138 SGZ-RG软管灌装封机  
Soft tube filling & sealing machine
- 139 SGZ-LS铝管灌装封机  
Aluminum tube filling & sealing machine
- 140 SGZ-CA气雾剂灌装机  
Aerosol filling machine
- 141 SFM全自动面部机  
Automatic facial mask filling & sealing machine

- 133 STB贴标机  
Labeling machine



● 旋盖机系列  
Capping machine series

141 SXG旋盖机  
Capping machine



● 喷码机系列  
Inkjet printer series

142 SPX 喷码机  
Inkjet printer



● 香水设备系列  
Perfume machine series

- 143 SXS-L香水冷冻过滤机  
Perfume freezing filter
- 144 SXS-G香水灌装机  
Perfume filling machine

● 袋装机系列  
Sachet packing machine series

- 151 SGZ-GY膏液袋装机  
Cream & liquid sachet packing machine
- 152 SGX-G粉体袋装机  
Powder sachet packing machine

● 辅助设备  
Auxiliary equipment

- 153 SPX双缸间歇式洗涤机  
Double line internal batch washing machine
- 154 SPX全自动瓶消毒机  
Full-automatic bottle-drying sterilizer
- 155 热风循环烘箱  
Hot Air Circulation Oven
- 156 SPX无级调速输送机  
Stepless speed adjustment conveyor
- 157 SPX轴流泵  
Pump
- 158 SRX研磨搅拌设备  
Grinding mixing equipment
- 159 SPX实验室设备  
Laboratory equipment
- 160 SPX不锈钢配件  
Stainless steel accessories
- 161 SPX一站式服务  
One-stop services



● 彩妆设备系列  
Makeup cosmetic machine series

145 SCM彩妆设备  
Makeup cosmetic machine



● 均质机系列  
Homogenizer series

- 146 SJB-G气动变径式高剪切均质机  
Pneumatic fix-type high shear homogenizer
- 147 SJZ-Y移动式高剪切均质机  
Movable high shear dispersing emulsifier

● 包装系列  
Packing machine series

- 153 SBZ-JD三维透明膜包装机  
Transparent film 3d packing machine
- 154 SBZ-FD 封切机  
Film sealing & cutting machine
- 155 SBZ-LF感应式铝箔封口机  
Aluminum foil sealing machine



真空乳化机系列  
Homogenizing emulsifier series

## SZR | Vacuum Homogenizing Emulsifier Series 真空均质乳化机系列

真空乳化机工艺流程 Flow chart of vacuum emulsifying mixer



### 真空均质乳化机定义

主要是指物料在真空的状态下，利用高剪切乳化器快速均匀地将一个相或多个相分布致另一个连续相中，其利用机械带来的强劲动能，使物料在定转子狭窄的间隙中，每分钟承受几十万次的液力剪切。离心挤压撞击撕裂等综合作用，瞬间均匀地分散乳化，经过高频的循环往复，最终得到无气泡细腻及稳定的高品质产品。

### Definition of vacuum homogenizing emulsifier

It means that when the materials are under the vacuum condition, it makes use of the high shear emulsifier to distribute one or several phases to another continuous phase rapidly and evenly. The materials will be processed in the narrow space between stator and rotor by strong energy of motion produced by the mechanical effect. By the operation of hydraulic shearing, centrifugal extruding, impacting, breaking and turbulence for over 100 thousand times per minute, the materials will be dispersed and emulsified instantly and evenly. After reciprocating circulation at high frequency, the fine finished products of stable and high quality without bubbles will be achieved.

### 性能及特点

- ◆ 本公司生产的真空均质乳化机种类品种多样化。其中均质系统分上均质、下均质，内外循环均质，搅拌系统分单向搅拌及双向搅拌、螺带搅拌；升降系统分单缸及双缸升降，并可根据客户要求定做各种组合所需高品质的产品；
- ◆ 三重搅拌采用进口变频器调速，可满足不同工艺生产需求；
- ◆ 德国技术的均质结构，采用进口双端面机械密封效果、最高乳化转速可达4200转/分，最高剪切细度可达0.2~5 μm；
- ◆ 真空脱泡使物料达到无菌要求，并采用真空吸料，特别对粉体物料利用真空吸入避免粉尘飞扬；
- ◆ 主锅锅盖可选配升降装置，清洗方便，清洗效果更显著，锅体可选用倾倒出料；
- ◆ 锅体采用了三层不锈钢进口板材焊接组成，罐体及管道为镜面抛光，完全符合GMP要求；
- ◆ 根据工艺要求，罐体可加热并冷却物料，加热方式主要有蒸汽及电加热两种；
- ◆ 为确保整套机器控制更稳定，电器采用进口配置，完全可达到国际化的标准。

### Performances and features

- ◆ The vacuum emulsifiers produced by our company include many varieties. The homogenizing systems include upper homogenization, lower homogenization, internal and external circulation homogenization. The mixing systems include single-way mixing, double-way mixing and helical ribbon mixing. The lifting systems include single-cylinder lifting and double-cylinder lifting. Various high quality products can be customized according to customers' requirements.
- ◆ The triple mixing adopts the imported frequency converter for speed adjustment, which can meet different technological demands.
- ◆ The homogenizing structure made through German technology adopts the imported double-end mechanical seal effect. The maximum emulsifying rotation speed can reach 4,200 rpm and the highest shearing fineness can reach 0.2~5 μm.
- ◆ The vacuum deaeration can make the materials meet the requirement of being aseptic. The vacuum material sucking is adopted, and especially for the powder materials, vacuum sucking can avoid dust.
- ◆ The emulsifying pot lid can adopt lifting system, easy to clean and the cleaning effect is more obvious, the emulsifying pot can adopt slit discharge.
- ◆ The pot body is welded by imported three-layer stainless steel plate. The tank body and the pipes adopt mirror polishing, which fully conforms to GMP requirements.
- ◆ According to technological requirements, the tank body can heat or cool the materials. The heating modes mainly include steam heating or electric heating.
- ◆ To ensure the control of the whole machine is more stable, the electric appliances adopt imported configurations, so as to fully meet the international standards.

### 主要组成部分

真空乳化机主要由水相锅、油相锅、乳化搅拌主锅、真空系统、升降系统(可选)、电器控制系统(可选用PLC)、操作平台等组成。

### Main composition

The vacuum emulsifying mixer is mainly composed of water pot, oil pot, emulsifying pot, vacuum system, lifting system (optional), electric control system (PLC is optional), operation platform, etc.

### 用途及应用领域

该产品主要应用于化妆品、生物医药、食品工业、涂料油墨、纳米材料、石油化工、印染助剂、造纸工业、农药品肥、塑料橡胶、电力电子、其他精细化工等，尤其对基质粘度大，固料含量比较高的物料乳化配置更显功效。

### Usage and application field

The product is mainly applied in such industries as daily chemical care products, biopharmaceutical industry, food industry, paint and ink, nanometer materials, petrochemical industry, printing and dyeing auxiliary, pulp & paper, pesticide, fertilizer, plastic & rubber, electronics and electronics, fine chemical industry, etc. The emulsifying effect is more prominent for materials of high base viscosity and high solid content.





真空乳化机系列  
Homogenizing emulsifier series

**SZR-HB**

Duplex Hydraulic Lifting Vacuum Homogenizing Emulsifier (bottom Homogenizer)  
双缸液压升降下均质真空均质乳化机



适用于化妆品厂、药厂的膏、霜类产品的生产，尤其对基质粘度大，固料含量比较高的物料乳化配制更显功效。

It is suitable for production of ointment and cream products in cosmetic and pharmaceutical plants. The emulsifying effect is more prominent for materials of high base viscosity and high solid content.

成功 & 智选 SIPUXIN®



主要技术参数 Technical parameter

规格 Model	有效容积 Effective Capacity	下均质机 Homogenizing Homogenizer		搅拌马达 Agitator		外形尺寸(mm) Outer Dimension			总功率(kW) Total power		
		KW	转速 rpm	KW	转速 rpm	长 Length	宽 Width	高 Height	电加热 Electric heating	蒸汽加热 Steam heating	
SZR-HB-5	5L	0.37	0~3000	0.18	0~63	1200	540	1800	1850	2	5
SZR-HB-10	10L	0.75	0~3000	0.37	0~63	1300	580	1800	1950	3	8
SZR-HB-50	50L	3~5.5	0~3000	1.1	0~63	2600	2250	1950	2700	9	18
SZR-HB-100	100L	4~7.5	0~3000	1.5	0~63	2750	2300	2100	2950	13	32
SZR-HB-200	200L	6.5~11	0~3000	2.2	0~63	2750	2750	2350	3350	15	40
SZR-HB-300	300L	7.5~11	0~3000	2.2	0~63	2900	2850	2450	3600	18	40
SZR-HB-500	500L	11	0~3000	4	0~63	3650	3000	2450	4000	24	60
SZR-HB-1000	1000L	18	0~3000	5.5	0~63	4200	3650	3000	4800	30	90
SZR-HB-2000	2000L	35	0~3000	7.5	0~63	4850	4300	3100	5400	40	-

注：本表中的数据为技术改造，定制机不计。以实物为准。  
Note: In case of inconsistency of the data in the table due to technical improvement or customization, the real object shall prevail.



真空乳化机系列  
Homogenizing emulsifier series

**SZR-HA**

Duplex Hydraulic Lifting Vacuum  
Homogenizing Emulsifier (Top Homogenizer)  
双缸液压升降上均质真空均质乳化机



机组采用上部同轴三重型搅拌器，液压升降开盖。快速均质搅拌器转速：0~3500 r/min(变频调速)；慢速刮壁搅拌器转速：0~63 r/min(变频调速)。均质器采用高剪切涡流式乳化搅拌机，慢速刮壁搅拌自动紧贴锅底及锅壁。采用真空吸料，特别对粉体物料利用真空吸人避免粉尘飞扬。整个工序在真空条件下进行。防止物料在高速搅拌后产生气泡，能达到卫生无菌要求。本机完全符合GMP要求制造。

The machine has triple blender, hydraulic lift cover, high-speed homogenizer (Speed is 0~3500r/min, frequency speed regulation) and low-speed scraper cylinder (Speed is 0~63r/min, frequency speed regulation). Fast-cutting vortex emulsification blender is used in the horn homogenizer part, which can scrape in a low speed and automatically blend and snuggle up to the bottom and wall of boiler. The machine draws powder material by the way of vacuum in order to prevent the powder flying. The whole working procedure is operated in the condition of vacuum in order to prevent the material coming into being bubble after high-speed blending and reach the request of sanitation and asepsis. The machine is made completely according to the GMP request.

成功&智选 SIPUXIN®



主要技术参数 Technical parameter

规格 Model	有效容积 Effective Capacity	上均质器 Homogenizer		刮壁斗夹 Scraper cylinder		外形尺寸(mm) Outer Dimension			总功率(kW) Total power	
		KW	r/min	KW	r/min	总长 Length	宽 Width	高 Height	电机 Max	电加热 Electric heating
SZR-HA-5	5L	0.37	0~3000	0.18	0~63	1260	540	1600	1550	2 5
SZR-HA-10	10L	0.75	0~3000	0.17	0~63	1300	580	1600	1950	3 6
SZR-HA-50	50L	3~5.5	0~3000	1.1	0~63	2600	2250	1950	2700	9 18
SZR-HA-100	100L	4~7.5	0~3000	1.5	0~63	2750	2300	2100	2950	13 32
SZR-HA-200	200L	8.5~11	0~3000	2.2	0~63	2750	2350	2350	3500	15 40
SZR-HA-300	300L	7.5~11	0~3000	2.2	0~63	2900	2850	2450	3600	18 40
SZR-HA-500	500L	11	0~3000	4	0~63	3650	3000	2850	4000	24 63
SZR-HA-1000	1000L	18	0~3000	5.5	0~63	4200	3650	3000	4800	30 90
SZR-HA-2000	2000L	35	0~3000	7.5	0~63	4850	4300	3100	5400	40 -

注：本表中的数据为技术改进，定制机不同，以实物为准。  
Note: In case of inconformity of the data in the table due to technical improvement or customization, the real object shall prevail.



真空乳化机系列  
Homogenizing emulsifier series

**SPX-F**

Fix-type Vacuum  
Homogenizing Emulsifier  
固定式真空均质乳化机



成功 & 智选 **SIPUXIN®**



主要技术参数 Technical parameter

型号 Model	物料容积 Capacity	乳化马达 Emulsify		搅拌马达 Agitator		外型尺寸 Outside Dimension			总功率 蒸气电蒸汽(KW) Total power steam/ electric heating	极限真空 (mmHg) limit vacuum
		KW	转速 r/min	KW	转速 r/min	长Length	宽Width	高Height		
SPX-F-150	150L	2.8-4	1440/2800	1.5	0-60	1270	2600	2300	730	-0.09
SPX-F-250	250L	6.5-8	1440/2800	2.2	0-60	1480	3650	2700	925	-0.09
SPX-F-300	300L	6.5-8	1440/2800	3	0-60	1580	2800	2800	1250	-0.09
SPX-F-600	600L	6.5-8	1440/2800	3	0-60	1780	3050	2950	1550	-0.09
SPX-F-800	800L	9-11	1440/2800	4	0-60	1850	3250	3150	2050	-0.09
SPX-F-1000	1000L	9-11	1440/2800	5.5	0-60	2100	3400	3650	20/75	-0.09
SPX-F-2000	2000L	11-14	1440/2800	5.5	0-60	2750	3850	4300	38/82	-0.09
SPX-F-3000	3000L	15-18	1440/2800	7.5	0-60	3000	4200	4500	45/120	-0.09



真空乳化机系列  
Homogenizing emulsifier series

## SPX-F

Fix-type Vacuum  
Homogenizing Emulsifier  
固定式真空均质乳化机



### 性能及特点

- ◆搅拌采用无级调速，使搅拌线速度在0~150m/min内任意调节，满足不同工艺要求；
- ◆先进的均质机，采用美国ROSS公司技术，结构独特，效率超群；
- ◆凡接触物料部分均采用进口不锈钢材料，容器内表面镜抛光300EMSH(卫生级)，符合卫生要求；
- ◆真空调料，真空脱泡，整个工艺在真空状态下完成，无细菌传染，延长产品保质期；
- ◆造型美观大方，外观采用特殊抛光技术，光泽如镜，更显设备豪华名贵。

### Capability & Characteristic

- ◆Stepless speed adjustment is adopted during the blending so that the speed of blending line can be randomly adjusted within the range of 0~150m/min to meet different technological requirements.
- ◆The advanced homogenizer adopts technology from USA ROSS Company, featured by unique structure and prominent efficiency.
- ◆The parts that contact the materials are all made of imported stainless steel. The interior surface of the vessel is subjected to mirror polishing 300EMSH (sanitary level), which is in accordance with sanitary requirements.
- ◆The whole process including vacuum material suction and vacuum defoaming can be completed under the vacuum status without cellular contamination, and thus, prolonging shelf life of products.
- ◆Beautiful and decent appearance, which adopts special polishing technology so that it is shining like a mirror, displaying luxurious character.

成功&智选 SIPUXIN®

## SPX-S

Small Vacuum  
Homogenizing Emulsifier  
小型真空均质乳化机





真空乳化机系列  
Homogenizing emulsifier series

**SPX-C**

Vacuum Paste &  
Cream Making Machine  
真空制膏机



成功&智选 SIPUXIN®



主要技术参数 Technical parameter

型号 Type	工作容量 Volume(L)	真空泵 Power of Vacuum Pump (kw)	液压泵 Hydraulic Pump (kw)	锅盖升降高度 Lifting Height of Water/Cover(mm)	外形尺寸 Dimension (L×W×H)(mm)	整机重量 Weight (kg)
SPX-C-100	100	2	1.1	800	2480×1500×2040	2500
SPX-C-200	200	4	1.6	1000	4830×3800×2480	3000
SPX-C-1300	1300	7.5	2.2	1000	1920×3910×3200	4600



液洗搅拌锅系列  
Liquid washing mixer series

**SJB** | Liquid Detergent  
Blending Mixer  
液洗均质搅拌锅



#### 最新研制

自吸式AES溶解器，在液洗产品生产中，减轻工人投料时的劳动强度，缩短溶料时间。

#### Latest research and development

During the production of liquid washing products, the self-suction type AES dissolver can alleviate worker's labor intensity of feeding and shorten dissolving time.

#### 性能及特点

- ◆ 全方位的刮壁搅拌采用了变频器调速，可根据客户要求生产不同工艺的高品质产品；
- ◆ 多样化的高速均质机，强力混合团块及液体原料在液洗生产中能快速溶解AES、AES-A、LSA等难溶物料，节约了能耗，大大缩短了生产周期；
- ◆ 壳体采用了三层不锈钢进口板材焊接组成。罐体及管道为镜面抛光，完全符合GMP要求；
- ◆ 根据工艺要求，罐体可加热并冷却物料，加热方式主要有蒸汽及电加热两种；出料方便，可直接出料，也可配置输送泵出料。

#### Performances and Features

- ◆ The wall scraping mixer adopts frequency converter to adjust the mixing speed which would make various kinds of products according to the customers' requirements;
- ◆ The diversified high speed homogenizer can powerfully mix solid liquid products and dissolve the material like AES, AES-A, LSA etc. It save energy consumption and shorten the production time;
- ◆ The pot body is welded with three layers imported stainless steel. The whole machine and pipes are mirror polished which is definitely satisfied with the GMP standard;
- ◆ According to different processing, the main pot can be heated and cooled down, steam heating or electric heating. Discharge from the bottom by the homogenizer or by a transfer pump.






液洗搅拌锅系列  
Liquid washing mixer series

SJB-D

Liquid Detergent  
Blending Mixer (single Tank)  
液洗均质搅拌锅(单罐)



#### 性能及特点

- 本机组专为中小型企业设计，生产产能可达三次，机组分主锅、副锅、不锈钢储料架、支架平台、控制系统。
- 只需在主钢锅内投料、溶解、搅拌、均质。再由输送泵输入副锅进行冷却、添加香精等。
- 出料时亦可放料，亦可用泵出料。
- 适用于电加热的工作环境，主锅用于加热均质，副锅直接用于冷冻、乳化，速度快、效益高。

#### Performances and Features

- The system is specially designed for small and medium-sized enterprises; it can work for three batches every day. The system consists of main pot, auxiliary pot, stainless steel suction pump, platform and controlling system.
- We shall pour materials into the main pot to dissolve, mix, homogenize. Then the material pump will transfer the material into the second pot to cool down or mix with perfume essence.
- It can be discharged by both the homogenizer and pump.
- It is better for electric heating condition. The main pot is used for heating and homogenizing, the second pot is used for cooling and emulsion. This makes it fast and efficient.

成功&智选 SIPUXIN®





液洗搅拌锅系列  
Liquid washing mixer series

SJB-Z

Liquid Detergent  
Blending Mixer (Combined Tank)  
液洗均质搅拌锅(组合罐)



主要技术参数 Technical parameter

序号 Serial No.	规格 Specification	容积 Volume	搅拌功率 Blending power	搅拌转速 Blending rotation speed	均质功率 Homogenizing power	均质转速 Homogenizing rotation speed	加热方式 Heating Method
1	SJB-Z-200	200	1.5	0-45	3	3000	蒸汽加热 Or electric heating
2	SJB-Z-500	500	2.2	0-45	4	3000	
3	SJB-Z-1000	1000	3.2-4	0-45	7.5	3000	
4	SJB-Z-1500	1500	4-5.5	0-45	11	3000	
5	SJB-Z-2000	2000	5.5	0-55	11	3000	
6	SJB-Z-3000	3000	7.5	0-63	15	1500	
7	SJB-Z-5000	5000	11	0-83	22	1500	

注：本表中的数据因技术改进、定制而有所变化，以实物为准。  
Note: In case of inconsistency of the data in the form due to technical improvement or customization, the real object shall prevail.

成功 & 智选 SIPUXIN®

用途

本公司生产的液洗均质搅拌机主要适用于液体洗涤剂如洗洁精、香波、沐浴露等产品的配置。搅拌机集搅拌、分散、加热、冷却、泵出料、脱泡(可选型)等功能于一体。是国内外目前厂家配置洗涤的理想设备。

Usage

This unit is available for manufacturing liquid products (such as detergent, shampoo, shower gel, etc.) it integrates mixing, homogenizing, heating, cooling, pump discharge finished products and defoaming (optional) functions. It is the ideal equipment for liquid products in domestic and international factories.






液洗搅拌锅系列  
Liquid washing mixer series

**SJB-P**

Polypropylene  
Anti- Corrosive Mixer  
聚丙乙烯防腐搅拌锅

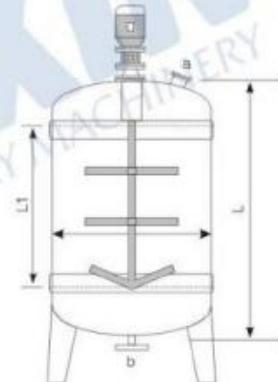

本厂生产的PP、PVC塑料搅拌机主要适用于化工、医药、石油等行业，特别适用于任何高腐蚀性的强酸、强碱化工生产亦适用于化妆品行业的电发水生产。

#### 特点

它的锅体用PP、PVC塑料制作，与任何化工产品不产生化学反应，搅拌浆叶由搪瓷制作。搅拌电机为防爆电机。它具有重量轻，安装维修方便，耐腐蚀性能好等优点。

其操作压力≤-0.1Mpa，操作温度(PP)-10℃~100℃，(PVC)-10℃~60℃。

This PP, PVC plastic mixer is mainly used in chemical, medicine, petroleum, and other industrial lines. It is specially for the strong caustic product. Such as the strong acid and alkali and the water for hair care product.

#### Feature

The mixer pot is made of PP, PVC, plastic material. It is very hard to reaction with any chemical product. The stirring blade is made of enamel. This machine has explosion preventin motor. It is very easy to operate, light, also can naticorrosive.

The work pressure ≤ -0.01Mpa, work temperature(PP)-10℃~100℃, PVC-10℃~60℃.

#### 主要技术参数 Technical parameter

容积(L) Volume	Φ	L	L1	a	b	搅拌功率 Mixing power	搅拌速度 Mixing speed
						KW	r/min
400	800	1050	650	360	50	1.5	0-63
800	800	1340	800	380	50	2.2	0-67
1500	1000	1650	1000	400	50	3	0-63
2000	1200	2000	1500	450	50	3	0-63
3000	1600	2300	1800	450	63	4	0-63
5000	1800	2500	2000	450	63	4	0-63



储罐系列  
Storage tank series

成功&智选

**SIPUXIN®**

**SCG-W**

Sterile Storage Tank  
无菌储罐





储罐系列  
Storage tank series

**SCG-F** | Flip-open Cover Storage Tank  
活动开盖储罐



**SCG-J** | Mixing Storage Tank  
搅拌储罐



根据贮存能力的不同由100~15000L，贮存能力在20000L以上的贮罐，建议使用室外贮藏，贮罐使用SUS316L或304-2B不锈钢制成。贮罐具有良好的保温性能，附带装置如下：进、出口料口、人孔、温度计、液位指示器、高低液位报警器、防爆、防尘呼吸气孔、无菌采样口、计量器、CIP清洗喷淋头。

成功&智选 SIPUXIN®



水处理系列  
Water treatment series

## SRO | Reverse Osmosis Water Treatment 反渗透纯水装置



SRO-500L全自動一級反滲透水處理裝置 (全不鏽鋼)  
SRO-500L Full Automatic One Stage Reverse Osmosis Water Treatment (Stainless Steel)



SRO-2000L/H全自動二級反滲透水處理裝置 (全不鏽鋼)  
SRO-2000L/H Full Automatic Two Stage Reverse Osmosis Water Treatment (Full Stainless Steel)

### 性能及特点

- ◆ 反渗透装置体积小，操作简单，适用范围比较广；
- ◆ 用反渗透装置，处理工业用水，不耗用大量酸碱，无二次污染，它的运行费用也比较低；
- ◆ 反渗透脱盐率≥99%，整机脱盐率≥97%，能够有效去除98%的有机物、胶体、细菌等；
- ◆ 产水电导率好，一级为≤10 μs/cm，二级为2-3 μs/cm左右，EDI ≤ 0.5 μs/cm(原水 ≤ 300 μs/cm)
- ◆ 操作自动化程度高，无需人工看守，水满自动停机。无水自动开机，自动空气定时冲洗前置滤料，IC微电脑控制器自动冲洗反渗透膜，原水、纯水电导率实现在线显示；
- ◆ 进口部件高达90%以上；

### Performances and features

- ◆ This system occupy little space, easy to operate, wide application range.
- ◆ When used for disposing industrial water, the reverse osmosis device does not consume large amounts of acids and alkalis, and there is no secondary pollution. In addition, its operation cost is also low.
- ◆ Reverse osmosis desalting rate ≥ 99%, machine desalting rate > 97%, 98% of organic matters, colloids and bacteria can be removed.
- ◆ Finished water under good electric conductivity, one stage ≤ 10 μs/cm, two stage around 2-3 μs/cm, EDI ≤ 0.5 μs/cm (base on raw water ≤ 300 μs/cm)
- ◆ High operation automation degree. It is unattended. The machine will automatically stop in case of water sufficiency and automatically start in case of no water. Timed flushing of front filtering materials by automatic controller. Automatic flushing of reverse osmosis film by IC microcomputer controller. Online display of raw water and pure water electric conductivity.
- ◆ Imported parts account for over 90%.

水处理工艺流程图 Water treatment process flowchart



成功&智选 SIPUXIN®



主要技术参数 Technical parameter

型号 Model	产水量(T/H) Capacity	电功率(KW) Power	回收率(%) Recovery	一级出水电导率(μs/cm) One Stage Finished Water Conductivity	二级出水电导率(μs/cm) Two Stage Finished Water Conductivity	EDI出水电导率(μs/cm) EDI System Finished Water Conductivity	原水导电率(μs/cm) Raw Water Conductivity
SRO-500	0.5	0.75	55~75	≤10	2~3	≤0.5	≤300
SRO-1000	1.0	2.2	55~75				
SRO-2000	2.0	4.0	55~75				
SRO-3000	3.0	5.5	55~75				
SRO-5000	5.0	7.5	55~75				
SRO-6000	6.0	7.5	55~75				
SRO-10000	10.0	11	55~75				
SRO-20000	20.0	16	55~75				

注：该表格上的参数只供参考，以实机为准。  
(The parameters are for reference only, the product depend on actual item.)



## SRO | Reverse Osmosis Water Treatment 反渗透纯水装置



SRO-1000L/H 前置软化水膜装置一级反渗透水处理  
With Pre-water Softener (Full Stainless Steel)



SRO-500L/H 全自动一级反渗透水处理(全不锈钢)  
SRO-500L/H Automatic One Stage Reverse Osmosis Water Treatment (Full Stainless Steel)



SRO-5000L/H 一罐反渗透水处理(PVC)  
SRO-5000L/H One Stage Pure Water Equipment (PVC)



SRO 一级反渗透水处理(PVC)  
SRO One Stage Pure Water Equipment (PVC)



SRO-1000L/H 反渗透水处理(PVC)  
SRO - 1000 L/H Reverse Osmosis Water Treatment (PVC)



连续电除盐反渗透系统  
EDI System



过流式紫外杀菌器  
Over-current Type Ultraviolet Sterilizer



臭氧发生器  
Ozone Generator



灌装机系列  
Filling machine series

## SGZ Fully Automatic Filling Machine 全自动灌装机

本系列活塞式灌装机适于灌装不同黏度的水剂类产品，广泛地适用于日化、食品、医药、油脂等各个行业。

This series piston filling machine is suitable for various kinds of high viscosity liquid products such as chemical, food, medical, grease industries etc.

本系列机种维护便利，无需任何特殊工具。真正做到调节便利、无瓶不灌、灌量准确。同时具有计数功能。

This series machine is easy for maintenance, operation, adjustment. It doesn't need any tools. It is with precise filling system, it will not start filling if there is no bottles and it is also with count function.



防腐型液体灌装机  
Anti-corrosion Liquid Filling Machine

### 结构与性能:

- ◆ 基机包括：二至十二个灌装头、可调速控制输送带、高强度不锈钢框架、日本三菱触摸屏等。
- ◆ 特色配置：有效防止滴漏与拉丝的灌装闷头、用于高泡产品的灌装升降系列、及进一步确保瓶口定位的横向瓶口定位系列。灌装头个数根据客户需要添加。

### Structre & performance:

- ◆ This machine can be made to 2-12 filling nozzles. The speed of conveyor belt can be adjusted. It is made of imported stainless steel frame bracket, Japan Mitsubishi touch screen etc.
- ◆ Special configuration: efficient anti-leakage and dripping. Automatic filling and raising design make it better for foam products. It is with positioner for sensor the bottle mouths. The filling nozzles can be made to order.

### 主要技术参数 Technical parameter

型号 Model	灌装容量 Filling volume	灌装速度 Filling speed	灌装精度 Filling precision	电源 Power supply	气压 Air source
SGZ-B(BA) (8 heads)	25-250ml, 50-500ml, 100-1000ml	60-80 bottles/min	< ± 1%	220V/50Hz	4-6Mpa

注：本多中的数据指技术改进，实际情况会有所差别。Note: The data in this table due to technological improvements, and is subject to prevail in kind.



自动灌装机+旋盖机+贴标机  
Automatic Filling Machine, Screw Capping Machine, Labeling Machine



灌装机系列  
Filling machine series

**SGZ-Y**

Full Automatic  
Liquid Filling Line  
全自动液体灌装线



六头全自动液体灌装机  
Six Nozzles Automatic Liquid Filling Machine



六头全自动液体灌装机  
Six-head Automatic Liquid Filling Machine

**SGZ-G**

Full Automatic Cream & Paste  
Filling Line With Bottle Turnable  
全自动膏体灌装线+理瓶机



全自动膏体灌装机+理瓶机  
Automatic Paste Filling Machine + Unscramble Bottle Machine



单头全自动膏体灌装机  
Single Nozzle Automatic Paste Filling Machine



双头全自动膏体灌装机+理瓶机  
Two Nozzles Automatic Paste Filling Machine + Feed Bottle Machine



灌装机系列  
Filling machine series

## SGZ-P

Rotating Filling &  
Cover Feeder & Capping Machine  
转盘式灌装旋盖一体机



全自动转盘式膏体灌装机  
Automatic Paste Filling Machine (Round Wheel Type)

### 工作方式 Working method

理瓶机上瓶—自动灌装—人工上内盖—自动上外盖—自动旋盖—成品退出  
Bottle loading on unscrambler—automatic filling—manual putting met—automatic covering—automatic capping—product exit

本产品适用于膏霜液体产品(如面霜、药膏、眼药水、指甲油、睫毛膏等产品的灌装上盖全自动化)产量快。是现在医药、彩妆厂家的理想设备。

The filling machine is suitable for cream liquid products (such as face cream, ointment, eyes drops, nail polish, eyelash cream etc.) It is fully automatic filling and capping and fast production. It is best choice for pharmaceutical and cosmetic manufactures.



## SGZ-L

Vertical Pneumatic  
Cream & Liquid Filling Machine  
立式气动膏液灌装机



立式膏体灌装机  
Vertical Paste Filling Machine

立式压力灌装机  
Vertical Pressure Filling Machine

立式颗粒灌装机  
Vertical Granule Filling Machine

立式气动恒温膏体灌装机  
Pneumocostant Temperature  
Cement Filling Machine

该产品适用于灌装膏体液体并且可灌装具有一定粘稠度的物料。可根据所调节的速度手动或自动灌装，在设备制造上，气动部件多数是采用了优质的进口部件，如气动元件采用了FESTO，根据需要可加装加热、搅拌系统。缸体采用了优质的不锈钢，活塞采用聚四氟乙稀制成，料缸连接部分采用的是快装连接，拆装清洗方便。其工作原理是通过空压机气源驱动活塞来完成吸料、出料。

This product suitable for filling cement liquid and viscosity materials. Filled by hand or automatic system according to the speed. For manufacturing, pneumatic components are mostly adopts imported parts, such as pneumatic components using FESTO. According to the needs, instead of heating, stirring system. The cylinder body adopts the high quality stainless steel, the piston is made of polytetrafluoroethylene, the cylinder connecting part is connected with fast. Convenient dismantling and cleaning. Its principle of work is adopted the air compressor and air driven piston to complete the suction.

### 主要技术参数 Technical parameter

型号 Model	灌装范围 Filling volume	精度精度 Filling precision	耗气量 Air consumption	气源压力 Air source pressure	生产能力 Productivity
SGZ-L-15	5-150ml	±0.2%	25L/min	0.2-0.8MPA	20-30000ml
SGZ-L-25	10-250ml	±0.2%	30L/min	0.2-0.8MPA	20-50000ml
SGZ-L-60	30-600ml	±0.2%	48L/min	0.2-0.8MPA	20-60000ml
SGZ-L-100	60-1000ml	±0.2%	80L/min	0.2-0.8MPA	20-100000ml
SGZ-L-250	250-2500ml	±0.2%	160L/min	0.4-0.8MPA	10-250000ml
SGZ-L-500	500-5000ml	±0.2%	300L/min	0.4-0.8MPA	5-150000ml



灌装机系列  
Filling machine series

## SGZ-W

Self-suck Horizontal  
Filling Machine  
卧式自吸式灌装机



卧式自吸式灌装机  
Semi-suck Horizontal Filling Machine



半自动双头卧式膏体灌装机(带料斗)  
6 Nozzles Semi-auto Horizontal Paste Filling Machine (With Hopper)



卧式自吸式灌装机(带不锈钢平台)  
Semi-suck Horizontal Filling Machine (With Table)



半自动双头卧式液体灌装机  
Two Nozzles Semi-auto Horizontal Liquid Filling Machine

### 主要技术参数 Technical parameter

型号 Model	灌装范围 Filling volume	灌装精度 Filling precision	用气量 Air Consumption	生产能力 Productivity
SGZ-W-15	5~150ml	±0.2%	25L/min	20~100b/min
SGZ-W-25	10~250ml	±0.2%	30L/min	20~100b/min
SGZ-W-40	30~500ml	±0.2%	44L/min	20~50b/min
SGZ-W-100	60~1000ml	±0.3%	87L/min	20~50b/min
SGZ-W-200	250~2000ml	±0.2%	165L/min	20~100b/min
SGZ-W-500	500~5000ml	±0.2%	300L/min	20~300b/min

## SGZ

Other  
Filling Machine  
其他灌装机



水剂灌装机  
Water Injector Filling Machine



半自动双头液体灌装机  
Semi-Automatic Double Head Liquid Filling Machine



气动压力灌装机  
Pneumatic Pressure Filling Machine



指甲油灌装机  
Nail Polish Filling Machine



加热式口红灌装机  
Lipstick Heating Filing Machine  
睫毛膏灌装机  
Eyelash Cream Filing Machine



手动膏液灌装机  
Manual Paste Liquid Filling Machine  
气动膏液灌装机  
Pneumatic Liquid Paste Filling Machine

成功 & 智选 SIPUXIN®



灌装机系列  
Filling machine series

## SGZ-RG

Soft Tube Filling &  
Sealing Machine  
软管灌装封尾机

### 产品说明

本机适用于日化、制药、食品、化工行业等采用软管包装的产品的灌装封尾、日期打印。本机特点：采用机械结构，运转平稳、速度快，效果好，噪音低，结构简单，操作及维修方便，故障率低。本机采用进口快速高效的加热器及高稳定流量计形成的热风加热系统，具有封口牢固、速度快、自动插管，自动定位，PLC控制，定位准确，异形封尾机使软管封尾千姿百态，配有有机玻璃防尘罩。



### Product instruction

This machine suits for filling & sealing double-color materials, date printing on the tubes, and can be applied in the industries of daily chemical, pharmacy products, food and chemical etc. Features: It adopts mechanical structure, smooth and fast operation, high efficiency, low noise, simple structure, convenient operation and maintenance and low fault. It enjoys rapid and efficient heaters and stable hot-air flow heating system which is imported, and it also has the advantages of firm sealing, high speed, automatic and precise position, PLC control systems, and various sealing machine makes the sealing end in different shaped. Assembled With dust-proof of organic glass.



超声波封尾机  
Ultrasonic Type Tube Sealing Machine

### 主要技术参数 Technical parameter

电源 Power Supply	380(220) V/50Hz
生产能力 Capacity	20-50c/min
灌装量 Filling Volume	10-200ml
计量精度 Dosage Precision	≤± 5% ≤± 1% ≤± 2%
可封管径 Tube Diameters Sealed	Φ 16-Φ 50mm
外形尺寸 Dimension(L × W × H)	2100 × 1020 × 2000mm
重量 Weight	600kg

成功&智选 SIPUXIN®

## SGZ-LG

Aluminum Tube  
Filling & Sealing Machine  
铝管灌装封尾机

### 产品说明

用途与性能：AFS铝管灌装封尾机是我公司研制的主要产品。此机型主要用以金属软管为包装容器的物料的灌装、封口。该产品采用射频式及半封闭式灌装膏、液。封口无渗漏，灌装重量、容量一致性好，灌装、封口、打印一次完成，适用于医药、日化、食品、化工等领域的产品包装。如：皮炎平、软膏、染发剂、牙膏、鞋油、胶粘剂、AB胶、环氧胶、氟丁胶等物料的灌装与封口。本机灌装量调节方便、快捷，外形美观，结构紧凑，管座为可调式管座，可根据灌装软管的尺寸调节。凡与物料接触部分全部采用优质不锈钢(常用304)、医用采用316L)。独特的整体结构，实现膏液两用，是医药、日化、精细化工等行业理想实用、经济的灌装设备。



全自动复合管灌装封尾机  
Automatic Laminated Tube Filling and Sealing Machine



### Product Instruction

Usage and Performance: AFS Aluminum Tube Filling & Sealing Machine used for Aluminum Tube is one of main latest products of our company. It is full automatic. This machine can be used for filling cream and liquid materials, and it is characteristics with firm filling, high precision of dosage. The three functions of filling, sealing and batch numbering can be automatically completed. It is widely used in pharmacy, daily chemical, food, chemical industries, such as for filling pharmacy cream, hair colorante, toothpaste, leather oil, glue, AB glue, epoxy adhesive, neoprene adhesive etc. Convenient and quick dosage adjustment, high efficiency, good-looking, compact structures are the features of the machine. The tube cups can be adjusted according to the tube dimensions. The important parts of the machine which contact directly to the filling material are made of stainless steel (SS304 is for general use, and SS316L is for pharmacy use). A special valve makes this machine be suitable for filling cream and liquid material. It is an ideal and economical filling machine in the pharmacy, daily chemical, fine chemical and other fields.

### 产品说明

本机适用于铝管的灌装封尾，四道折边，封尾牢靠美观。

### Product instruction

It is suitable for filling and sealing aluminum tube, with 4 seams. The sealed end is firm and attractive.

### 主要技术参数 Technical parameter

电源 Power Supply	380(220) V/50Hz
灌装量 Filling Quantity	10-50ml 50-100ml 100-200ml
计量精度 Dosage Precision	≤± 5% ≤± 3% ≤± 2%
生产能力 Capacity	30c/min
可封管径 Tube Diameters Sealed	Φ 16-Φ 50mm
外形尺寸 Dimension(L × W × H)	1200 × 1000 × 1700mm
重量 Weight	200kg

半自动铝管管封尾灌装机(自动对标)  
Semi Auto Aluminum Tube Filling and Sealing Machine (Automatic Code Aligning)





灌装机系列  
Filling machine series

**SGZ-Q**

Aerosol  
Filling Machine  
气雾剂灌装机



三合一气雾剂灌装机  
Triad Aerosol Filling Machine

#### 三合一气雾剂灌装机

Adb-air Three-in-one Aerosol Filling Machine

该机由原半自动气雾剂灌装机经过改进、优化、集成而来。将半自动灌装、封口、充气三台机器安装在一个工作台上。只需一人操作脚踏离一次即可同时完成所有动作。速度快，精度高，稳定性好，省时省力，是中小型气雾剂生产厂家的理想选择。

This machine is made from the former semi-automatic aerosol filling machine. It assembles the liquid filling, inflate and seal on the same table. It needs only one worker to operate it. It has high speed, high-accuracy and good stabilization. Good choice for the medium-sizes and small-scale company.

#### 主要技术参数 Technical parameter

灌装容量 Filling capacity	30~900ml
灌装精度 Filling accuracy	<±1%
生产能力 Production capacity	800~1200 bph
适用阀门 Fit for valve	1"



半自动气雾剂灌装机  
Semi-automatic Aerosol Filling Machine

#### 全自动气雾剂灌装机

Adb-air automatic aerosol filling machine

该机吸收国外先进技术，灌装头单独控制，无罐不出料；封口头采用导向式射口，如封口质量不高机器就会自动停止；充气头采用导向式充气，准确、高效、耗气极少。可配置自动称重机、自动压盖机及喷码机。目前该机在同行中属领先水平，已远销欧洲、美洲、非洲、东南亚。

The machine is produced by absorption of foreign advanced technology. Its filling end is controlled separately, no discharging without filling; being sealing-guided, the machine will automatically stop if the sealing quality isn't good; the way of the oriented inflation in the charging end is accurate and efficient with minimal gas consumption. It can be matched with automatic weighing machine, automatic capping machine and spray code machine. Being in the peer-leading level, the machine has been exported to Europe, America, Africa, and Southeast Asia.

#### 主要技术参数 Technical parameter

灌装容量 Filling capacity	50~750ml
灌装精度 Technical Parameters	<±1%
充气容量 Inflation Capacity	50~750ml
充气精度 Inflation Accuracy	<±1%
封口精度 Crimping Accuracy	<±3%
生产能力 Production Capacity	1800~2400 cans/hr
工作压力 Working Pressure	0.65~1Mpa
最大气量 Maximum Air Consumption	3m³/min
适用气罐直径 Applicable Aerosol Can Diameter	35~65mm
适用气罐高度 Applicable Aerosol Can Height	80~300mm



全自动气雾剂灌装机  
Automatic Aerosol Filling Machine

**SFM**

Automatic facial Mask  
Filling & Sealing Machine  
全自动面膜机


成功&智选 SIPUXIN®

#### 技术特点

- 包装过程全自动，无需人工操作；
- 物料接触部分均采用优质不锈钢制造，符合GMP标准；
- 智能检测，有袋灌装封口，无袋、不充填。无袋、不封口；
- 德国PLC系统，功能强大，经久耐用；
- 整机控制采用7寸采色中文触摸屏，设备运行参数设定方便、直观。同时具备产量统计和设备故障自动诊断功能，让生产管理、设备管理更高效；
- 智能数显温控系统，封口温度自动补偿，控温精准，封口不良率超低；
- 整机气动原件均选用知名品牌，工作寿命长，维护更换方便；
- 可根据客户需要订做不同的充填方式，灌装头数量可定制。

#### Technical feature

- Automatic packaging process, no need to manual operation;
- Material contact parts adopt high quality stainless steel manufacturing, according to GMP standard.
- Intelligent detection, bag filling sealing, no bag, no filling, no sealing.
- Germany PLC system, powerful, durable.
- The machine applies 7 inch color touch screen with easy and clear setup parameter, as well as auto diagnosis for errors.
- Intelligent digital display temperature control system. The sealing automatic temperature compensation, temperature control precision, the seal failure rate low.
- The machine pneumatic selects the well-known brand, long working life, convenient maintenance replacement.
- According to customer different way of packing, the filling nozzles can be customized.

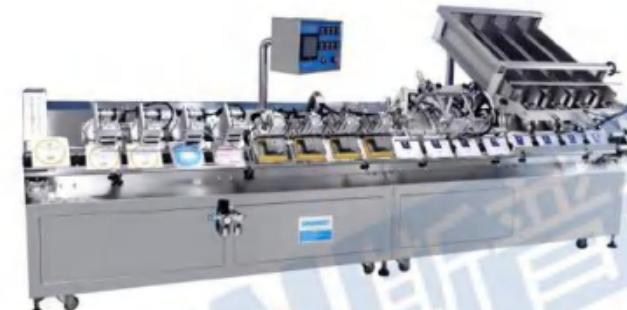

#### 主要技术参数 Technical parameter

包装速度 Packing speed	3500~4000
功率 Power	2.8KWAC-380
灌装精度 Filling accuracy	±0.2~0.5
灌装頭數 Filling heads	4
工作氣壓 Work pressure	0.6~0.8MPa
封口溫度 Sealing temperature	120~180°C
可封袋範圍 Scope of sealing	190~140mm W120~180mm
開袋方式 Method for open the bag	Suction to open bag



新款高速面膜机  
New Design High Speed Mask  
Filling and Sealing Machine



贴标机系列  
Labeling machine series

**STB** | Labeling Machine  
贴标机



产品功能特点

- ◆ 本机型适用于化妆品、饮料、医药行业；
- ◆ 中英文触控操作系统，真正实现人机对话，操作简单易学；
- ◆ 适机机可伸缩空间调整，更换不同尺寸的产品调节简单快捷；
- ◆ 采用动力软胶辊确保贴标质量。气缸夹钳结构提高贴标精度；
- ◆ 专用圆瓶贴标，重复贴标精度高、无气泡；
- ◆ 往复式气缸定位产品，可在产品的指定位置精确贴标，一次可选贴一张标签或两张标签，特别适合圆瓶的前后对称贴标；
- ◆ 可根据客户需要连接生产线流水作业，单机作业可增加自动上料架等设备，也可根据需要特殊定制。

Product features

- ◆ This model applies to cosmetics, beverages and pharmaceutical industries areas.
- ◆ Equip with PLC touch screen has two language of Chinese and English,easy to operate.
- ◆ Labeling sending system can be changeable by adjustment of 2-dimensional space, easily changeable to suitable for different bottles size.
- ◆ Adopt dynamical soft rubber-covered roll to make sure labeling quality, the structure of Cylinder stamping roller would improve the labeling precision.
- ◆ Specialized for roundbottles, precision is high and will not appear bubble on the surface.
- ◆ Air compressor is reciprocating type to position the bottles, it can stick one or both label at one time,it is special suitable for both sides labeling.
- ◆ We can customized machine for your request, the labeling machine can be connect with filling machine,screw capping machine, material transport pump etc.

成功&智选 **SIPUXIN®**



圆、扁瓶适用全自动贴标机  
Automatic Round & Flat Bottle Labeling Machine



半自动双面扁平贴标机  
Semi-automatic Two Sides Flat Bottle Labeling Machine



全自动高速圆瓶贴标机(定位贴)  
Automatic High Speed Round Bottle Labeling Machine  
(Appointed Position)



全自动平面贴标机  
Automatic Plane Labeling Machine



半自动圆瓶贴标机  
Semi-automatic Round Bottle Labeling Machine



半自动扁瓶贴标机  
Semi-automatic Flat Bottle Labeling Machine



## SXG | Capping Machine 旋盖机

### 原理及特点

可适用于食品、制药、日化、农药、化妆品等行业的不同瓶形的旋盖。四台调速电机分别用于供盖、夹瓶、传送、旋盖，机器自动化程度高，稳定性好，调节方便，更换瓶型或盖时无须备件，只需作调整即可完成(如配上盖机，可进行自动上盖)。



全自动旋盖机  
Automatic Screw Capping Machine

### Principle and features

Suitable for the cap screwing of different shapes of bottles in the industries of foodstuff, pharmaceuticals, daily chemical, pesticide and cosmetics etc. Its four adjustable speed motors are used respectively for cap supplying, bottle clamping, delivering and cap screwing. It is characterized by high level of automation, outstanding stability, easy adjustment, no need of spare parts for replacing bottle types or caps, which can be done only by making adjustment. (If fitted with capping machine, it may carry out automatic capping).



高精度高速自动旋盖机  
High Speed Automatic Screw Capping Machine  
(Apply to All Kinds Bottle Shape)



全自动铝盖螺纹旋盖封口机  
Automatic Aluminum Cap Screw Capping and Sealing Machine



半自动旋盖机  
Semi-automatic Screw Capping Machine



手持式旋盖机  
Portable Manual Screw Capping Machine



## SPX | Inkjet Printer 喷码机

### 性能及特点

- ◆ 喷印字符种类：阿拉伯数字、英文、中文、图形、商标等。
- ◆ 喷印功能：

  - 顺序号，批号，产品计数显示并喷印；
  - 日期编排，实时时钟自动变更显示并喷印；
  - 信息延时喷印，信息重复存储喷印；
  - 反向倒转字体喷印；
  - 字符加粗加宽1~9倍选择喷印；
  - 字体的高度和宽度任意调整。

- ◆ 喷嘴墨水喷射墨压移稳定性好，可设定、可自动检测调整。
- ◆ 先进的墨水粘度测量装置和准确的控制软件，确保长期恒定的墨水粘度。
- ◆ 采用独特的相位检测电路和软件，可以在各种环境下保证打印质量。



成功 & 智选

**SIPUXIN®**

### Performance and feature

- ◆ Printing character types: Arabic numerals, English, Chinese, graphics, trademarks, etc.
- ◆ Printing functions:
  - Display and printing of sequence No., batch No., shift No. and product count;
  - Display and printing of date scheduling, real-time clock automatic change;
  - Information delayed printing, information repetitive storage and printing;
  - Printing of reverse and inverted characters;
  - Printing of characters thickened and widened by 1~9 times;
  - Free adjustment of character height and width.
- ◆ The nozzle has stable ink jetting pressure, and setting, automatic detection and adjustment can be carried out.
- ◆ The advanced ink viscosity measuring device and accurate control software ensure long-term constant ink viscosity.
- ◆ The unique phase detection circuit and software are adopted to ensure printing quality under various environments.



### 主要技术参数 Technical parameter

型号 Model	K200
字体点阵构成 Character dot lattice composition	5×7, 7×9, 8×8, 16×16, 24×24
喷码行数 Printing line	三行喷印信息 (喷印信息 Can be three lines of printing information)
字符高度 Character height	1.5~12mm
最快喷印速度 Highest printing speed	喷印速度: 6米/秒 (5×7点阵单行最快) / Printing Speed: 6m/min (5×7 lattice single is fastest)
喷丝速率 Wire speed	1600字符/秒 (单行5×7点阵) / 1600 characters/min (single line 5×7 lattice)
喷印方向 Printing direction	360° 全方位喷印 (360° Omni-directional spray print)
喷印材料 Printing material	纸, 塑料, 金属, 玻璃, 木材, 瓶盖, 罐头, 化妆品等 (Paper, Plastic, Metal, Glass, Wood, Rubber, Tins, Lids, Cosmetics and other industry, etc.)
材质 Material	全氟不锈钢 Full stainless steel
使用电源 Power supply	220V±20% AC
功率 Power	125W
机器尺寸 Machine size	400 × 210 × 510mm
喷头 Nozzle	46 × 40 × 180mm
机器重量 Machine weight	30kg



**SCM** Makeup Cosmetic Machine  
彩妆设备



压粉机  
Powder Compacting Machine



口红填充机  
Lipstick Filling Machine

**主要用途**

产品适用于充填口红、腮红、唇膏等产品。十二口红，瞬间完成，一定能够满足各方面的高质量充填要求。

**结构与性能**

- ◆ 本机机身采用不锈钢材料制作，经过精心缜密设计，外观美丽大方，符合力学原理。
- ◆ 不锈钢316L双层料桶（内外抛光）隔油加热。料桶采用搅拌及温控。
- ◆ 充填部分采用机械式动作，精准的步进电机为该设备提供了准确的充填定量，其旋转角度精确到0.02度。
- ◆ 人机智能与电热系统方面，采用PLC控制整个动作过程，使该机更具人性化。简易明了的人机介面使操作更简单，发热方面是用高科技的温控仪系统控制，整个系统可同时控制二十组温度，减免了单个操控的复杂与繁琐，带来整个稳定出色的发热系统。

**Usage**

This machine is suitable for filling lipstick and lip gloss, lip balm etc.it is with 12 filling nozzles, instant filling certain to meet various kinds of requirements.

**Structure & performance**

- ◆ This machine is made of stainless steel which is conformed to mechanical principle with the beautiful appearance and precise design.
- ◆ Stainless steel 316L double jacket material tank is mirror polished from both inner and outer surface. It is with mixing and temperature controlling system.
- ◆ Filling part adopt mechanical movement, advanced motor makes the precise filling volume reach 0.02 degree.
- ◆ Full automatic control system, simple computer interface makes operation easier. The heating system is fixed with advanced temperature controlling system which can control 20 units of temperature data to avoid troublesome and complex of simple control. It makes the heating system stable and excellent.

成功&智选 SIPUXIN®

**特点**

- ◆ 动作方式可依作业情况或使用者的需求采用手动模式或自动模式；
- ◆ 压粉下压计时设计可设定压板压粉时间并能增加压板停顿时间；
- ◆ 保压计时设计可以让粉中的空气有排除时间，而更符合各种原料的特性；
- ◆ 压粉计数设计可设定压皮下降次数，增加对原料的适应性；
- ◆ 需要双手同时按压按钮来启动运转，确保使用者的安全。

**Characteristic**

- ◆ It depends on the production situation or user's requirements to select manual way or automatic way.
- ◆ Time of compaction is adjustable.
- ◆ This design is keeping powder to be compacted for a long time so as to let air out of powder completely.
- ◆ Powder compact counting function can set up the pressing board working times, which suit for more materials.
- ◆ It is necessary to press down the bush button with both hands simultaneously to start it up to ensure the safety of the operator.



压粉机  
Powder Pressing Machine



三轴搅拌均质机  
Three-axis Powder Homogenizing Mixer



口红冷冻机  
Lipstick Chiller



筛粉机  
Powder Sieving Machine



口红脱模机  
Lipstick Stripper Machine



香水设备系列  
Perfume machine series

## SXS-L Perfume Freezing Filter 香水冷冻过滤机



### 标准配置

- ◆ 不锈钢保湿冷冻罐及钛金属盘管
- ◆ 超低温冷冻机组(进口)
- ◆ 防腐气动隔膜泵(进口)
- ◆ 聚丙烯微孔过滤膜(可选板框过滤器)
- ◆ 不锈钢移动支架
- ◆ 密封式电控系统及卫生级管件阀门

### Standard configurations

- ◆ Stainless steel heat preservation freezing tank and titanium metal coil pipe
- ◆ Ultra low temperature freezing unit (imported)
- ◆ Anticorrosive pneumatic diaphragm pump (imported)
- ◆ Polypropylene microporous filtration film (plate and frame filter is optional)
- ◆ Stainless steel moveable supporter
- ◆ Sealing type electric control system and sanitary pipe fittings and valves

成功&智选 SIPUXIN®

### Product introduction

This product is a latest product developed by our company specially used for clarification and filtration of liquid such as cosmetics and perfume etc. after freezing. It is an ideal device for filtering cosmetics and perfume in cosmetics factory. The product is made of high quality 304 stainless steel or 316L stainless steel. The pneumatic diaphragm imported from USA is adopted for pressure source to carry out positive pressure filtration.


### 产品介绍

本产品是我公司最新开发出来的专业用化妆品、香水等经过冷冻对液体的澄清过滤；是化妆品厂净化化妆品、香水的理想设备。本产品材质均采用优质304不锈钢或316L不锈钢制作，用美国进口气动隔膜泵，作为压力源，进行正压过滤。

连接管道采用卫生级抛光管件，均采用快装式连接形式，方便拆卸和清洗。

配套使用聚丙烯微孔过滤膜，广泛用于化妆品行业、科研部门、医院、实验室等单位对少量液体的澄清和除菌过滤。或微量化学分析，方便可靠。

### 典型香水工艺流程图 Representative technological flow chart of perfume

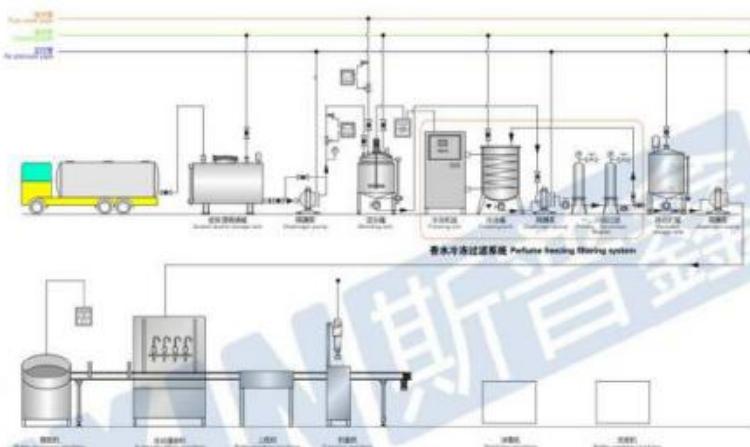

### 主要技术参数 Technical parameter

型号 Model	SXS-L 3P-200	SXS-L 3P-300	SXS-L 5P-300	SXS-L 5P-500	SXS-L 10P-500	SXS-L 10P-1000	SXS-L 15P-1000
冷冻功率 Freezing power	3P	3P	5P	5P	10P	10P	15P
冷冻容量 Freezing capacity	200L	300L	300L	500L	600L	1000L	1000L
过滤精度 Filtration precision	0.2μm	0.2μm	0.2μm	0.2μm	0.2μm	0.2μm	0.2μm



香水设备系列  
Perfume machine series

## SXS-L | Perfume Freezing Filter 香水冷冻过滤机



SXS-L-200L 香水冷冻过滤机(一体机)  
SXS-L-200L Perfume Mixing Freezing Filtering Machine (Integral Machine)



板框式过滤器  
Frame type filter



可移动式二级过滤装置  
Moveable Two Stage Filter



SXS-L-500L 香水冷冻过滤机(分体机)  
SXS-L-500L Perfume Mixing Freezing Filtering Machine (split Machine)



微孔膜过滤器  
Membrane Filter

## SXS-G | Perfume Filling Machine 香水灌装机

香水灌装机，用于花露水、香水和其它水性物料的灌装。本机采用负压、定液面方式灌装，有四头和六头两种规格。根据用户需要，可提供防爆型。

Perfume filling machine is used for filling floral water, perfume and other water-based materials. The machine adopts negative pressure and fixed liquid surface type filling. It includes two kinds of specifications such as four-head and six-head. Explosion-proof type products can be provided according to user requirements.

### 特点 Features

负压吸液灌装，产品灌装量以液面高度为计量方式。装有脚轮，移动方便。  
与物料接触零件及台面均用304不锈钢材质。  
适用于玻璃瓶，或抽真空后瓶体不易变形的塑料瓶。调整、操作、维修方便。  
Negative pressure liquid sucking filling. The filling volume is measured according to liquid level.  
Caster wheels are installed for convenient movement.  
The parts and table surface that contact the materials are all made of 304 stainless steel.  
Suitable for glass bottles, or plastic bottles whose body will not be easily deformed after vacuum extracting.  
Convenient adjustment, operation and maintenance.



四头真空香水灌装机  
Four Nozzles Perfume Vacuum Filling Machine

## 香水轧盖机 Perfume Capping Machine

### 特点

外形美观，结构紧凑；收口均匀，密封性好；  
瓶盖定位准确，表面无磨损；  
采用气动控制，操作维护方便。

### Features

Beautiful appearance and compact structure.  
Even cap closing with good sealing performance.  
Accurate cap positioning without abrasion on the surface.  
Pneumatic control is adopted. Convenient operation and maintenance.



香水轧盖机为夹紧式收口机，适用于喷雾式瓶盖的收口。本机利用夹头将瓶盖收口，紧固于瓶口凸缘上。整机由机身、台面、夹紧装置和气动控制系统组成。

The perfume capping machine is a kind of clamping type cap closing machine. It is suitable for cap closing of spray type caps. The machine uses the clamp to close the cap and fasten it on the edge of bottle mouth. The whole machine is composed of machine body, table surface, clamping device and pneumatic control system.



均质机系列  
Homogenizer series

**SJZ-G**

Pneumatic Fix-type  
High Shear Homogenizer  
气动固定式高剪切均质机



**SJZ-Y**

Movable High  
Shear Dispersing Emulsifier  
移动式高剪切均质机



多样化均质机 Diversified Homogenizer

液压升降 Hydraulic Lift



双轴分散式  
Double Bearing Dispensing Type



单轴分散式  
Single Bearing Dispensing Type



液压升降高剪切  
Hydraulic Lifting High Shear



## SGZ-GY | Cream & Liquid Sachet Packing Machine 膏液袋包机



全自动膏液袋包装机 Fully-auto Liquid Packing Machine

### 特点

该机是集自动制袋、计量、灌装、封口、切袋为一体。有单袋和四袋联动包装机之分。其中Y型为膏、液体用；X型为固体物包装用，可采用三边封或四边封设计，封口牢固，废品率低。广泛应用于日化、食品、制药、化工等行业。包装材料：纸/聚乙烯；聚酯、聚乙烯：尼龙/聚乙烯；聚酯/尼龙/聚乙烯等。

### Feature

This machine integrates bag producing, counting, filling, sealing and bag cutting, and is divided into single bag packaging machine and four bags packaging machine. Y type is used for cream and liquid materials, X type is used for solid materials, both adopt three sides or four sides sealing, the sealing effect is firm and the unqualified rate is low. This series machine is widely applied in daily chemical, food, pharmacy, and chemical industries. The packaging materials include: paper/polyethylene, polyester, Polyethylene, nylon/polyethylene, polyester/aluminum foil/polyethylene, etc.

### 主要技术参数 Technical parameter

型号 Type	SGZ-GY
名称 Name	液体包装机 Liquid packaging Machine
计量范围 Fill Capacity	0~50ml
包装速度 Speed	35~70袋/min
计量方式 Measuring Method	柱塞泵 Plunger pump
封袋尺寸 Dimension	120×85



全自动膏液袋包装机  
Fully-auto liquid packing machine

## SGX-F | Powder Sachet Packing Machine 粉体袋包机



粉体袋包机  
Powder Sachet Bag Packing Machine



感应称重式粉体灌装机  
Inductive Weighing Powder Filling Machine



全自动粉体袋灌装机  
Automatic Powder Filling Machine Bags



螺杆式粉体灌装机  
Screw Powder Filling Machine

### 特点 Feature

该机采用了伺服电机下料形式及先进的工业计算机控制系统，通过人机“对话”，可方便准确的实现制袋尺寸在幅度的增长或减短及包装速度和包装容量的调整变化；中英文触摸式液晶显示屏可实现各项功能的设置，使操作更加简捷明确。该机为两段热封辊筒的封口方式，能进行三边封或四边封式的制袋及包装。主要适用于粉末的包装。

This machine adopts servo motor filler and advanced industrial computer control system. With the interactivity between users and the machine, it can achieve wide-range adjustment of pouch's length and capacity as well as the packing speed conveniently and precisely. With two heating-rod, Chinese-english touch screen LCD realize various function settings this machine can achieve three sides or four sides sealing of bags as it adopt two sides heating & sealing way. This machine is mainly suitable for the powder package.

### 主要技术参数 Technical parameter

产品型号 Model Number	SGX-F
生产能力 Capacity/segment	10-60
计量范围 Range of measurement	30~300
封袋尺寸 Bag dimension	长1180~160 宽190~100
功率 Power (W)	1000
电源电压 Power voltage	380V/50Hz 220V/50~60Hz
包装材料 Packing material	纸袋/PE, PET/AL, PET/PE, PET/尼龙/PE, 茶叶滤纸等 Paper/PE, PET/Aluminum foil, PET/PE, Nylon/PE, Tea-fest Ricing paper etc.
净重 Net weight(g)	150
外形尺寸 Overall dimensions	750x380x1450mm(LxWxH)



包装系列  
Packing machine series

## SBZ-3D

Transparent Film  
3D Packing Machine  
三维透明膜包装机

### 功能特点

本机器是用玻璃纸或BOPP镀膜对不同规格的硬纸包装盒、包装品等进行三维包装的设备。该机是我公司在吸收国内外同类产品先进技术的基础上进行创新设计而成的。它以机械联动机构以为主体,采用无极变速调速和自控电气附属设备、集机、电、气为一体，具有运行稳定可靠、封口牢固、平整美观等特点。可对物品进行自动包裹、热封、计数，并自动粘贴防伪易拉线。包装速度可无级调速、缺盒不下膜、对色标(按客户要求)等功能，在更换少量零件的情况下，可包装不同规格的盒式物品。

### Functional Features

This machine is suitable for overwrapping different specification of carton, box with cellophane or BOPP film, which is designed innovatively on the basis of introducing and absorbing the congeneric products advanced technology at home and abroad. The main body of the machine is mechanical united structure. It introduces stepless frequency speed controller, automatic control and electrical accessory equipment. On the combination of machine, electricity and pneumatic parts, it has the feature of stable and reliable operation, firm sealing, smooth surface and beautiful appearance. It can do packing automatically, heat sealing, counting, and automatically sticking tear tape to single or multiple cases. The machine has stepless packing speed adjustment, no film feeding protection component if case-track, and color bars calibration feature etc.(according to customer's requirements) We only need to change few parts to pack variety of specification of products.



半自动透明膜三维包装机  
Semi-automatic Transparent Film 3D Packing Machine



全自动透明膜三维包装机  
Auto Transparent Film 3D Packing Machine



### 主要技术参数 Technical parameter

包装速度 Packaging speed	12-25 盒/分钟/min	
	高 高 高 高 高 高	cm/min
包装尺寸 Specifications of package	(L)1100~400mm(W) 45~240mm(H)50~115mm	
设备尺寸 Specifications of the machine	(L)12180×(W)1060×(H)1500mm	
输送带尺寸 Specifications of conveyor	(L)1600×(W)370×(H)70mm	
主气路工作压力 Main air route working pressure	0.6~0.7mpa	

成功&智选

SIPUXIN®

## SBX-FQ

Film Sealing &  
Cutting Machine  
封切膜机



二合一封切收缩包装机  
Two-in-one Sealing And Cutting Shrink Packing Machine



远红外收缩膜机  
Far Infrared Shrink Film Packing Machine



L型收缩膜机  
L-type Shrink Film Packing Machine



热收缩膜机  
Heat Shrink Film Packing Machine

### 主要技术参数 Technical parameter

型号 Type	入口尺寸 Dimension	加热带 Heating tape	风机转速 Rotation of ventilator	额定功率 Rated power	额定电压 Rated voltage	工作电源 Working power	输送速度 Rotation of convey
SBX-FQ-2A	250/150	7	3000	3000	21	220V 50HZ  380V 50HZ  0~120/min (可调)	0~120/min (可调)
SBX-FQ-3A	350/200	8	3000	3000	22.5		
SBX-FQ-1B	400/200	8	3000	3000	22.3		
SBX-FQ-4A	350/250	9	3000	3000	33		
SBX-FQ-3C	450/200	10	3000	3000	37.3		
SBX-FQ-4C	500/300	10	3000	3000	37.3		
SBX-FQ-5C	600/300	10	3000	3000	37.3		



包装系列  
Packing machine series

## SBZ-LF

Aluminum  
Foil Sealing Machine  
感应式铝箔封口机



自动电感感应铝箔封口机  
Automatic Electric Inductor Aluminum Foil Sealing Machine



自动电磁感应铝箔封口机  
Automatic Electromagnetism Inductor Aluminum Foil Sealing Machine



立式多功能自动塑料薄膜连续封口机  
Plastic Film Continuous Sealing Machine



卧式多功能自动塑料薄膜连续封口机  
Horizontal Type Plastic Film Continuous Sealing Machine



手持式铝箔封口机  
Manual Induction Aluminum Foil Sealing Machine



手持式铝箔封口机  
Manual Induction Aluminum Foil Sealing Machine



辅助设备  
Auxiliary equipment

## SPX

Double Line Internal  
Bottle Washing Machine  
双列间歇式洗瓶机



半自动洗瓶机  
Semi Automatic Bottle Washing Machine



双列间歇式洗瓶机  
Bottle Washing Machine

SPX采用人工上瓶，间歇式定位内外冲洗，两道水洗，一道气吹，保证高压水柱和压缩空气准确吸入瓶内，水洗第一道采用自来水，第二道采用纯水(纯水配水箱，可循环利用)，第三道采用气吹，用来吹干水滴，提高烘干效率。



蒸汽锅炉  
Steam Generator

SPX Bottles are placed to this machine by hand, beach located and both inside and outside washed. In this machine, bottles will be washed twice by water and once by air. The machine could guarantee high pressure water column and compressed air jet into bottles precisely. Bottles will be first washed by normal clean water, then by pure water (Pure water will be stocked in a water tank and recycled), at last by compressed air which could blow droplet off the bottle and enhance the efficiency of bottle dry.

### 主要技术参数 Technical parameter

冲瓶头数 Washing heads: 48头(pcs)

工作效率 Capacity: 2000~3000瓶/小时(bottles/hour)

电机功率 Power: 1.5kW/220V

适用瓶高 Suitable Bottle Height: 50~150mm

适用瓶径 Water Consumption: 25~80mm

用水量 Suitable Bottle Dia: 1.5 m<sup>3</sup>/h

冲瓶压力 Working Pressure: 0.2~0.4 MPa

外型尺寸 Machine Size: 2700 x 670 x 1180(mm) (L x W x H)



辅助设备  
Auxiliary equipment

## SPX | Full-automatic Bottle-drying Sterilizer 全自动烘瓶消毒机

### 性能及特点

- ◆ 外观美观新颖，采用全不锈钢制作；
- ◆ 整机烘瓶过程为连续不间断式工作；
- ◆ 占地面积小，节省烘干时间，可做到随时烘；
- ◆ 烘干机的传送为变频调整，可根据不同的瓶型任意调节烘干速度，烘干温度可在0~300℃之间任意调节，保证原瓶烫金，烫银之效果；
- ◆ 紫外线杀菌，确保玻璃瓶烘干后不带有活细菌，延长产品的保质期；
- ◆ 内部烘干采用不锈钢风热棒，确保其使用寿命；
- ◆ 烘瓶速度50~200个/分钟。



全自动烘瓶消毒机  
Full-automatic Bottle-drying Sterilizer

### Performance and feature

- ◆ Appearance is beautiful and modern, it adopts completely stainless steel;
- ◆ The drying process is continuous;
- ◆ It occupies small area, save a lot of time;
- ◆ The speed of feeding is able to adjustable frequently. You can adjust the speed in according to different bottles model. Temperature of drying is 0~300°C, will not destroy the effect of foil stamping or Silver foil;
- ◆ Ultraviolet sterilization, make sure it won't have survival of bacteria after drying;
- ◆ Inside of the drying box adopts stainless steel wind heating rod;
- ◆ Drying speed:50~200 pcs/min.

## 热风循环烘箱 Hot Air Circulation Oven

该系列产品全部采用轴流风机，配用了自动恒温湿度控制系统，并备有电脑控制系统以供选择。其工作原理是利用蒸汽或电力能源，通过换热器加热空气，以轴流风机为动力，使热物料含湿量降低，达到干燥目的。

The series of products completely adopt axial fan equipped with automatic constant temperature control system, which is provided with computer control system for option. The working principle is to make use of the steam or electric heat source, through heating the air by heat exchanger and adopting the axial fan as the driving power, the moisture content of hot materials is reduced so as to realize the purpose of drying.

### 主要技术参数 Technical parameter

型号 Model	蒸发面积 (m <sup>2</sup> )	加热功率 (Kw)	风机功率 (Kw)
SPX-100(单门)	?	9	0.45
SPX-200(双门)	14	15	0.45



热风循环烘箱 Hot Air Circulation Oven

## SPX | Stepless Speed Adjustment Conveyor 无级调速输送机

### 皮带输送机

皮带输送机是经济型的输送设备，适用于输送100kg以下的物品或粉状、颗粒状物料，具有运行平稳、噪音低、连续输送、外形美观的特点。皮带输送机除可以输送普通的物料外，还可以满足耐油、耐热、耐腐蚀、防静电等特殊物料输送。

### Belt conveyor

The belt conveyor is an economic conveying device, which is suitable for conveying powder and granule materials below 100kg. It has such features as stable operation, low noise, continuous conveying and beautiful appearance etc. In addition to conveying ordinary materials, the belt conveyor can also convey oil-resistant, heat-resistant, anticorrosive and anti-static special materials.

### 链板输送机

链板输送机的输送面平坦光滑，摩擦力小，物料在输送线之间的过渡平稳，可输送各类玻璃瓶、PET瓶、易拉罐等物料，也可输送各类箱包。链板有不锈钢和工程塑料等材质，也可采用联接于牵引链上的各种结构和形式的平板或隔板等承载构件来承托和输送物料。

### Chain scraper conveyor

The conveying surface of the chain scraper conveyor is flat and smooth with small friction. The transition of materials between the conveying lines is stable. It can be used to convey various glass bottles, PET bottles and pop cans etc. materials, as well as various luggage and baggage. The chain scraper can be made of stainless steel and engineering plastic materials. The flat plates or dispositions of various structures and forms connecting the traction chain can be used as supporting components to support and convey materials.





辅助设备  
Auxiliary equipment

**SPX** | Pump  
输送泵



**SPX** Grinding Mixing Equipment  
研磨搅拌设备

功能特点

乳化、均质、分散、混合、粉碎、研磨、各类乳状液物料广泛应用于食品、制药、化工、利用化工、陶瓷、沥青、炸药、煤炭等行业。

设计紧凑、造型美观。密封良好。性能稳定。操作方便、装修简单。效率高等特点。是外理精细物料的理想设备。YFJ系列产品除特型电机及部分部件外，凡与物料接触的部件全部采用高强度不锈钢制成，尤其关键的动、静磨盘进行热处理强化，因此具有良好的耐腐和耐磨性，使所加工的物料无污染，卫生纯洁。

Functional Features

Emulsifying, homogenizing, dispersing, mixing, crushing, various kinds of emulsion material are widely use in food, pharmaceutical, chemical, china, asphalt, explosive, coal mine area, etc.

Compact design, beautiful appearance, well sealing, stable performance, it is easy to operate and maintenance, high efficiency which is an ideal equipment to deal with fine tiny material. YFJ Series product except some special type model, the rest is adopt high strength stainless steel which is contact with material. Especially dynamic and static millstone. And it has good performance in protect it from corrosion and abrasion, make sure the final product without pollution and tidy.





辅助设备  
Auxiliary equipment

**SPX** | Laboratory Equipment  
实验室设备



成功&智选 SIPUXIN®



进口均质机  
Imported Homogenizer



搅拌机  
Mixer



均质机  
Homogenizer



均质机  
Homogenizer



搅拌机  
Mixer



旋转粘度计  
Rotary Viscometer



水分快速测定仪  
Moisture Analyzer



显微镜  
Microscope



超净工作台  
Laminar Flow Cabinets(Clean Bench)



离心机  
Centrifugal Machine



电热干燥箱  
Electric Heat of Drying Oven



高压蒸汽灭菌锅  
High Pressure Steam Autoclave Pot



辅助设备  
Auxiliary equipment

**SPX** | Stainless Steel Accessories  
不锈钢配件



**SPX** | One-stop Services  
一站式服务

成功&智选 **SIPUXIN®**

本公司配合市场及客户的需要，不断研发、更新以及完善各类产品，全力打造中国首个化妆品机械“一站式”购物平台。诚邀海内外客户提供机械设备、化妆品原料、包材及技术咨询等服务。

According to our market and our customer's requirement, we are continuously in researching, developing and improve ourselves. We are focusing on building the first platform of "One-stop" service in our cosmetic machinery area. Which already provides high quality, the fast service for the general new old users at home and abroad.

